

CC 10




ULTRA SONIC LINE, DEDICATED TO STRIPPING PROCESS

PRODUCTION CAPACITY

- Cycle time : 4 minutes
- Lenses / cycle : 12 → 14
- Lenses / hour : 180 → 210
- Type of lenses : all types Ø 40 to 80 mm

SCL
international
HARD COAT LEADER



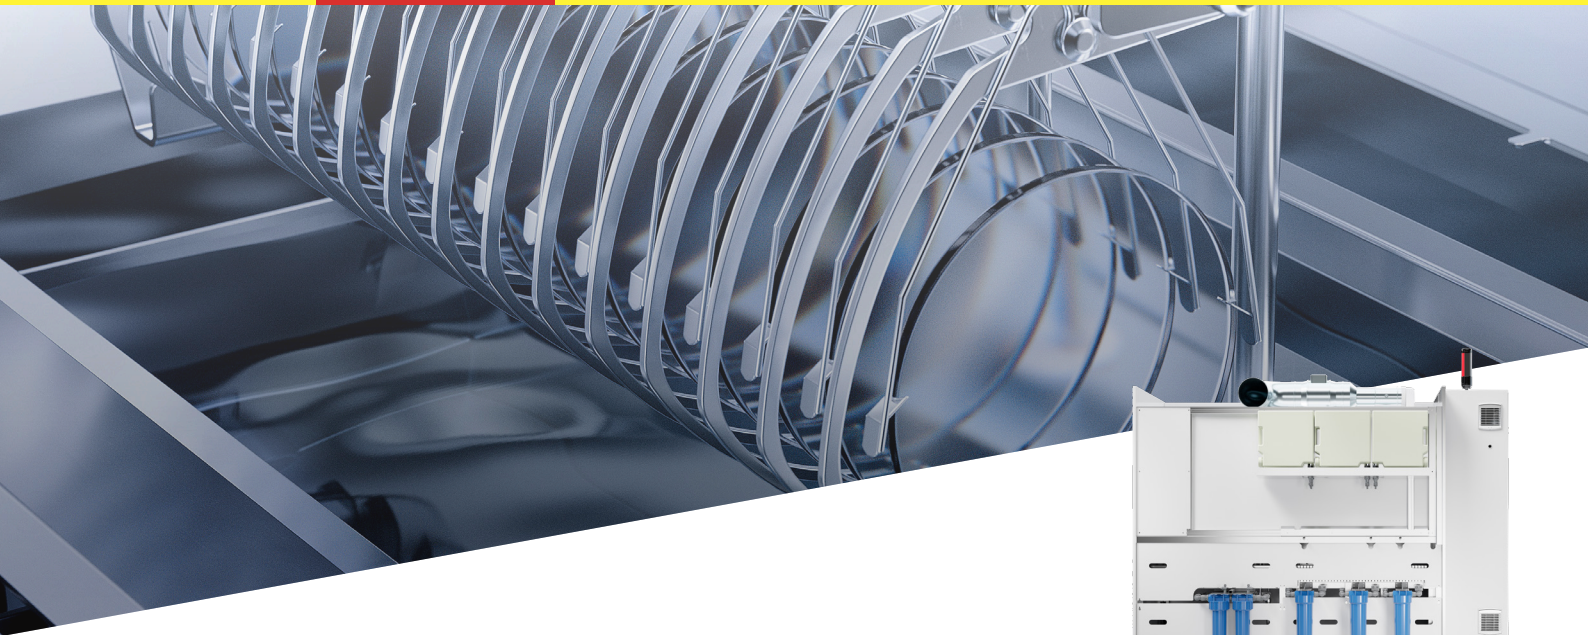

SPECIFICATIONS

- Limited foot print
- 1 single zone for cleaning
- Automatic detergent refilling
- Simple design for 1 or 2 shift use
- Remote connection to SCL service team
- Optimized water and energy consumption
- User friendly HMI

BENEFITS

- For compact layout
- ISO6 cleaning chamber
- Easy maintenance, stable process and no production stop
- Easy maintenance
- Easier and faster diagnosis. Upgrading possibility
- Sustainable process

TECHNICAL DATA

Machine in 1 part

Dimensions : 235 x 120 x 235 cm

Weight : ~ 750 kg

Electricity : 7,5 or 15,5 kW / 400 V (3Ph + N + Gnd)

Flow machine left to right

CE and UL compliance

PERIPHERALS

- Automatic osmosis unit for ultra pure water production
- Handheld service unit for US adjustment
- Lens-holders and rack for 12 or 14 lenses



www.scl-intl.com

SCL
international

HARD COAT LEADER

