


CC 10

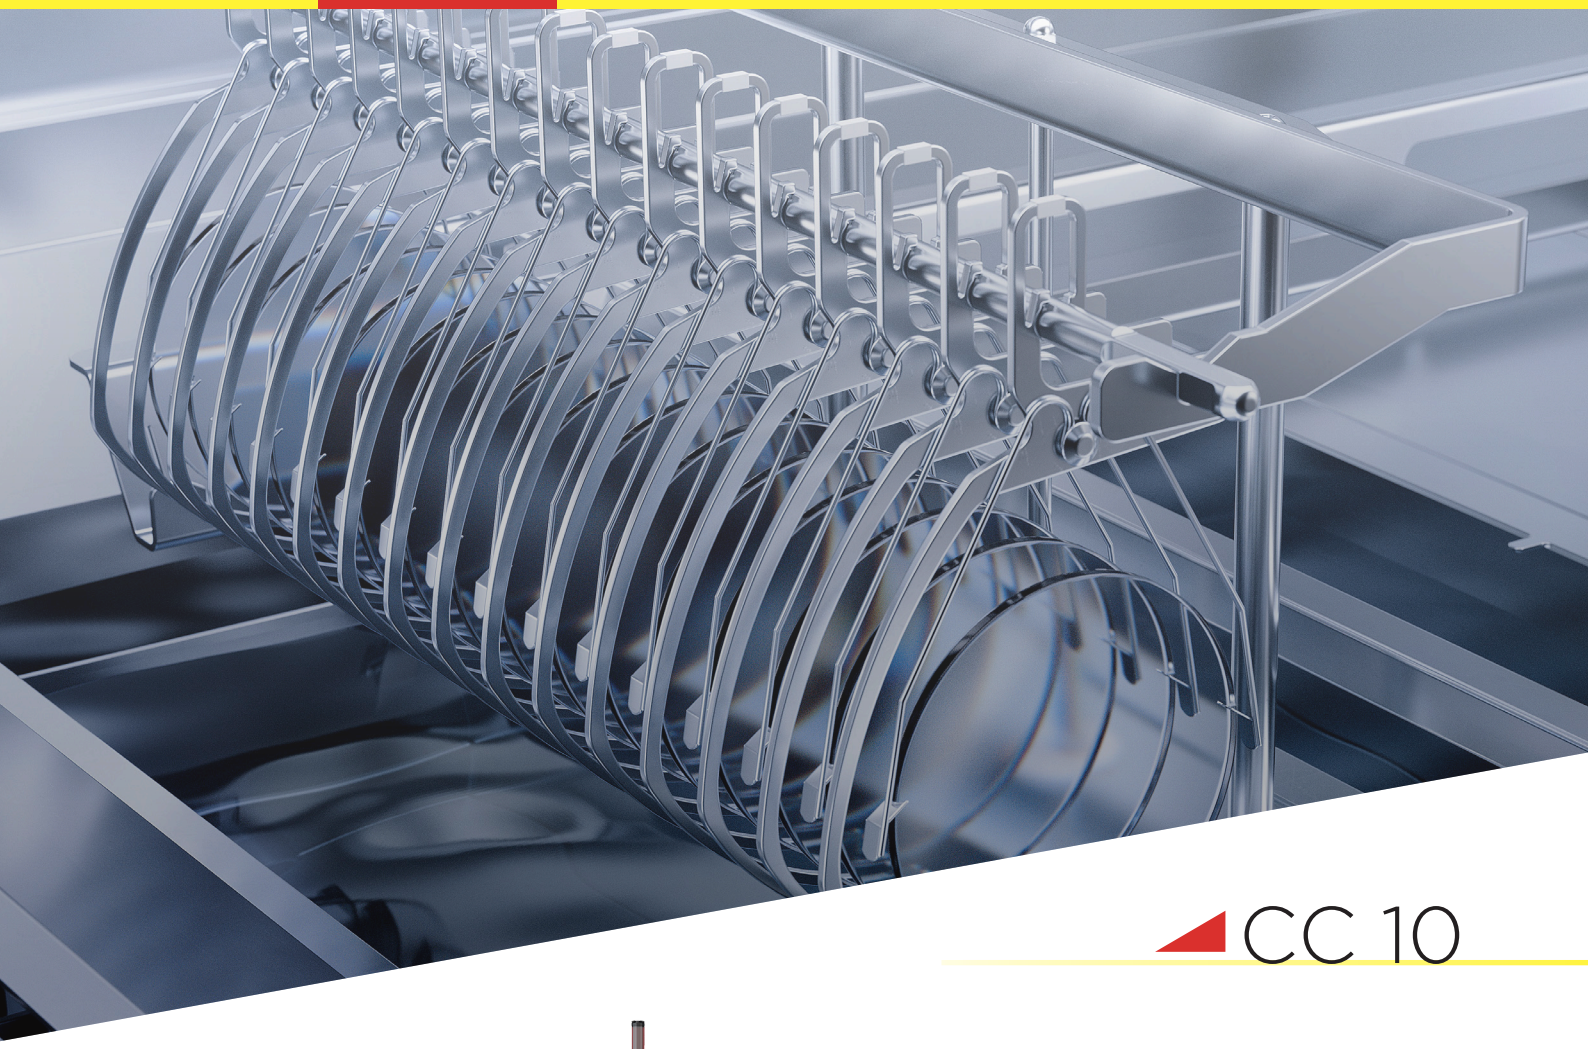


ULTRA SONIC LINE, DEDICATED TO STRIPPING PROCESS

PRODUCTION CAPACITY

- Cycle time ..... : 4 minutes
- Lenses / cycle ..... : 12 → 14
- Lenses / hour ..... : 180 → 210
- Type of lenses .....: all types Ø 40 to 80 mm

SCL international
HARD COAT LEADER

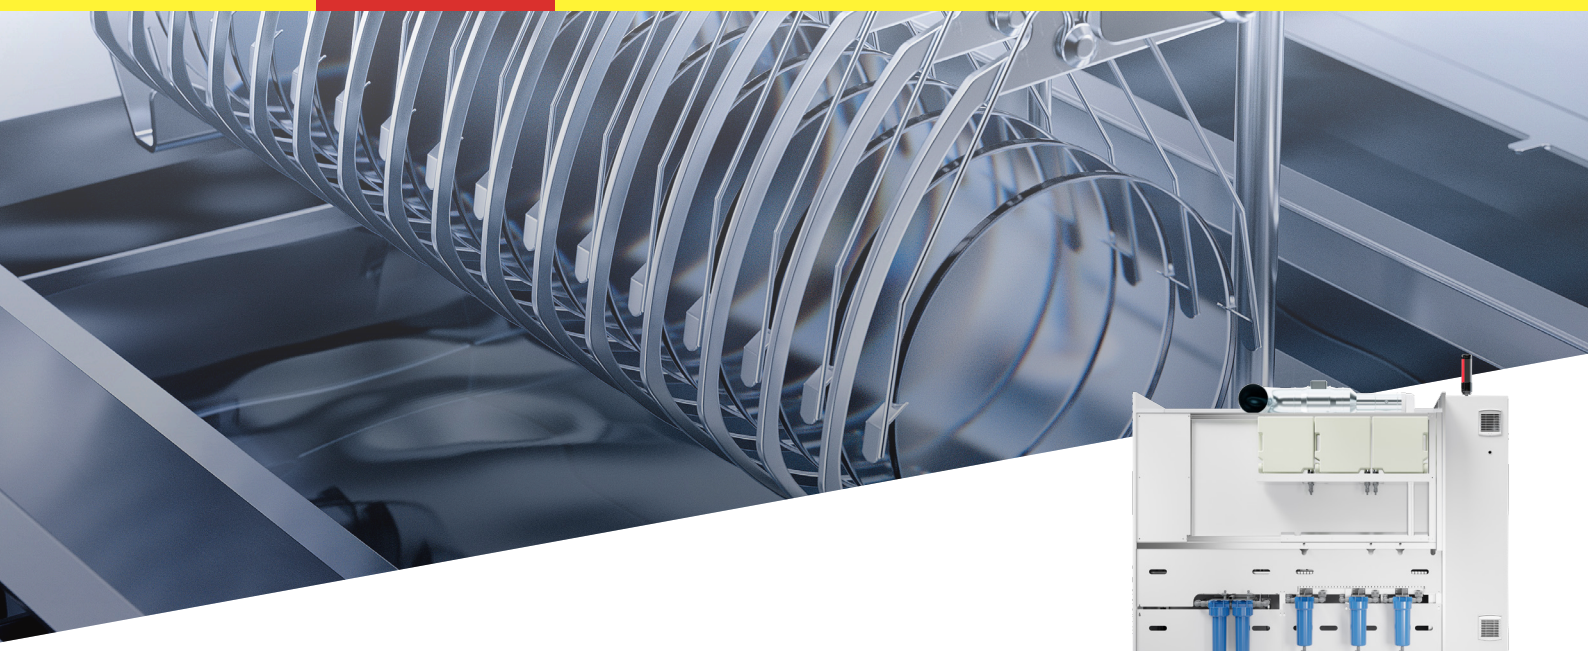

SPECIFICATIONS

- Limited foot print
- 1 single zone for cleaning
- Automatic detergent refilling
- Simple design for 1 or 2 shift use
- Remote connection to SCL service team
- Optimized water and energy consumption
- User friendly HMI

BENEFITS

→ For compact layout
→ ISO6 cleaning chamber
→ Easy maintenance, stable process and no production stop
→ Easy maintenance
→ Easier and faster diagnosis. Upgrading possibility
→ Sustainable process

TECHNICAL DATA

Machine in 1 part
Dimensions ..... : 235 x 120 x 235 cm
Weight ..... : ~ 750 kg
Electricity ..... : 7,5 or 15,5 kW / 400 V (3Ph + N + Gnd)
Flow machine left to right
CE compliance

PERIPHERALS

- Automatic osmosis unit for ultra pure water production
- Handheld service unit for US adjustement
- Lens-holders and rack for 12 or 14 lenses

www.scl-intl.com

SCL international
HARD COAT LEADER