HARD COAT CLEANING TINTING PERIPHERALS CONSUMABLES EXPERTISE





ULTRASONIC CLEANING AT ITS BEST

■ PRODUCTION CAPACITY

Cycle time ~ 5 minutes
Lenses / cycle 12 → 14

• Lenses / hour 120 → 140

• Type of lenses all types \varnothing 40 to 80mm
















HARD COAT CLEANING TINTING PERIPHERALS CONSUMABLES EXPERTISE

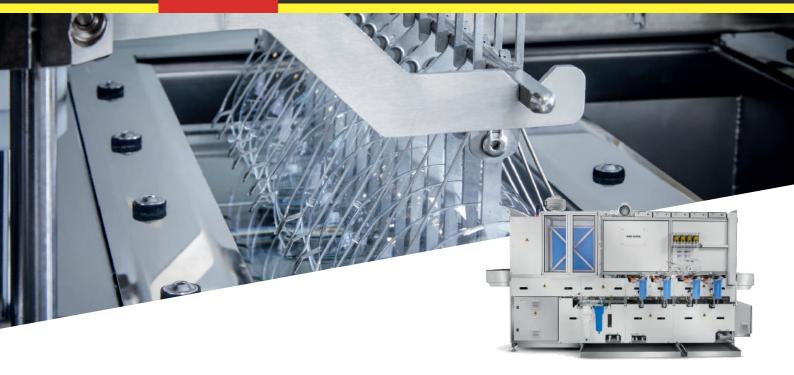

SPECIFICATIONS

- Ultrasonic cleaning anywhere in the process
- 1 single zone for cleaning
- 1 IN and 1 OUT automatic conveyors
- Automatic detergent and water refilling
- Customisable machines: cleaning line with 7, 8 or 9 tanks
- Designed for heavy-duty use
- Remote connection to SCL service team
- Optimized water and energy consumption
- User friendly HMI

BENEFITS

- → ISO6 cleaning chamber
- → Less contamination of process zones. IN and OUT buffers
- → Easy maintenance, stable process and no production stop
- → Available options to fit customer's needs
- → Very limited downtime
- → Easier and faster diagnosis. Upgrading possibility
- → Sustainable process

■ TECHNICAL DATA

Machine in 1 part

Dimensions 405 x 162 x 205 cm

Weight ~ 800 kg

Electricity 11,8 or 20,2 kW / 400 V (3Ph + N + Gnd)

Flow machine left to right or from right to left

CE and UL compliance

✓ PERIPHERALS

- Automatic osmosis unit for ultra pure water production
- Draining tank with lift pump
- Ergonomic preparation/control station
- Lens-holders and rack for 12 or 14 lenses



www.scl-intl.com



