
HARD COAT CLEANING TINTING PERIPHERALS CONSUMABLES EXPERTISE



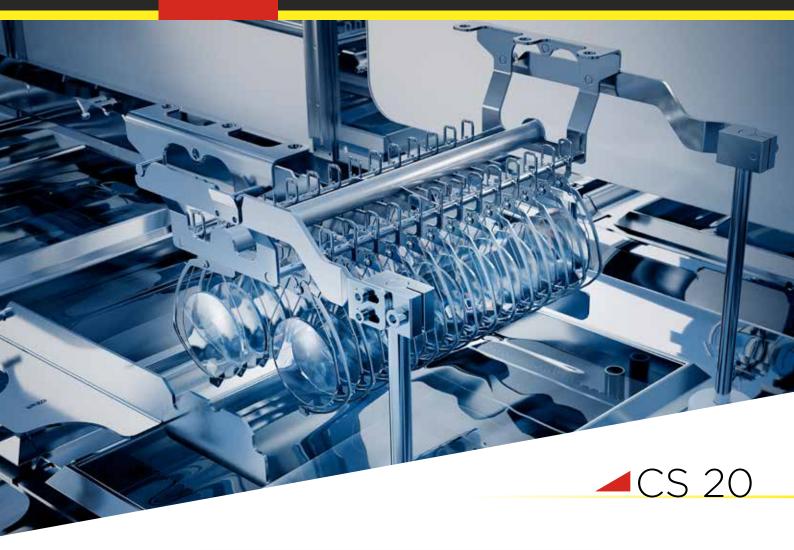

ULTRASONIC CLEANING AT ITS BEST

# **■ PRODUCTION CAPACITY**

- Type of lenses ...... all types  $\varnothing$  40 to 80mm















**HARD COAT CLEANING TINTING PERIPHERALS** CONSUMABLES **EXPERTISE** 



## **SPECIFICATIONS**

- Ultrasonic cleaning anywhere in the process
- 1 single zone for cleaning
- 1 IN and 1 OUT automatic conveyors
- Automatic detergent and water refilling
- Customisable machines: cleaning line with 7, 8 or 9 tanks
- Designed for heavy-duty use
- Remote connection to SCL service team
- Optimized water and energy consumption
- User friendly HMI

#### **BENEFITS**

- → ISO6 cleaning chamber
- → Less contamination of process zones. In and out buffers
- → Easy maintenance, stable process and no production stop
- → Available options to fit customer's needs
- → Very limited downtime
- → Easier and faster diagnosis. Upgrading possibility
- → Sustainable process

## TECHNICAL DATA

Machine in 1 part

Weight ..... ~ 1325 kg

Electricity ...... 17,2 kW / 400 V (3Ph + N + Gnd)

Compressed air ...... No

Flow machine left to right or from right to left

CE and UL compliance

## PERIPHERALS

- Automatic osmosis unit for ultra pure water production
- Draining tank with lift pump
- Ergonomic preparation/control station
- Lens-holders and rack for 28 or 32 lenses





