



CS 10




ULTRASONIC CLEANING AT ITS BEST

### PRODUCTION CAPACITY

- Cycle time .....: ~ 5 minutes
- Lenses / cycle .....: 12 → 14
- Lenses / hour .....: 120 → 140
- Type of lenses .....: all types Ø 40 to 80mm

**SCL**  
international  
HARD COAT LEADER



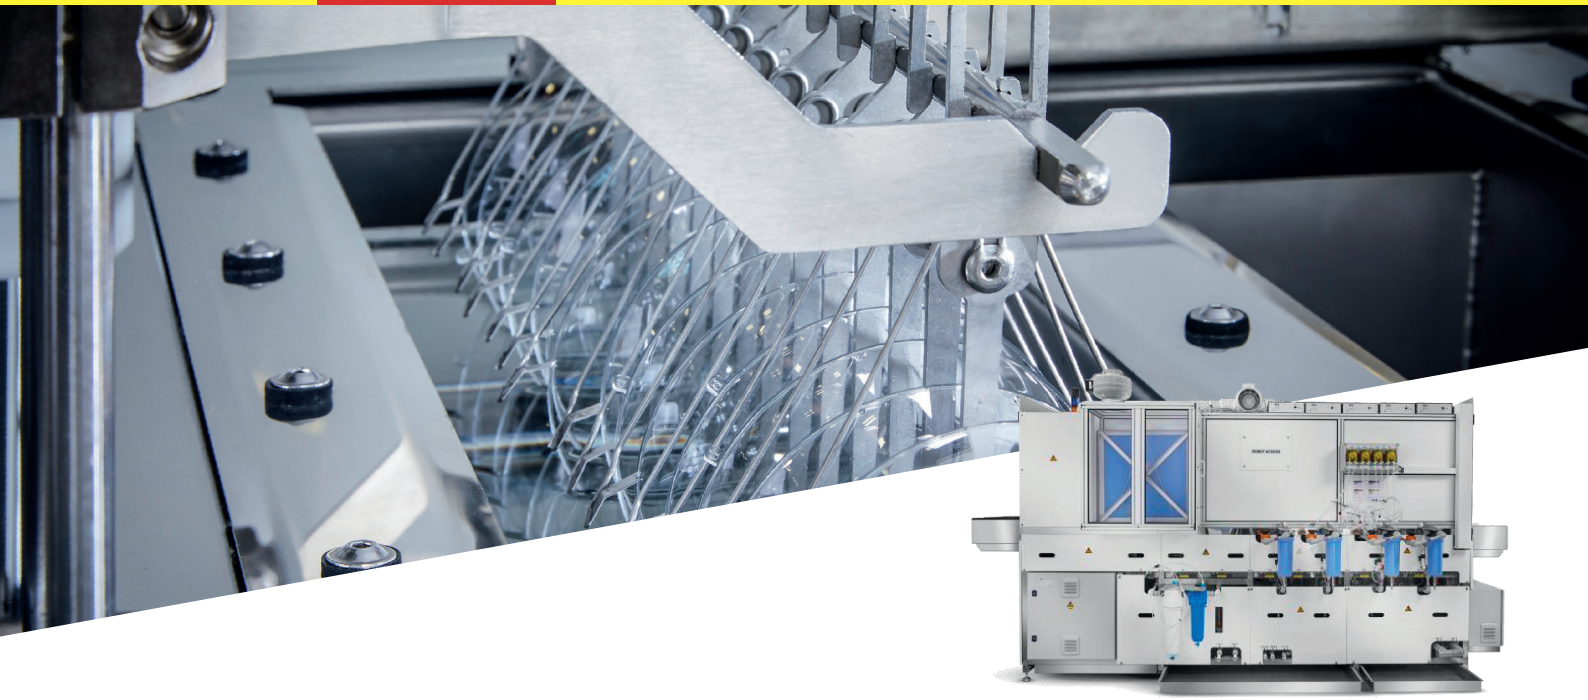

### SPECIFICATIONS

- Ultrasonic cleaning anywhere in the process
- 1 single zone for cleaning
- 1 IN and 1 OUT automatic conveyors
- Automatic detergent and water refilling
- Customisable machines: cleaning line with 7, 8 or 9 tanks
- Designed for heavy-duty use
- Remote connection to SCL service team
- Optimized water and energy consumption
- User friendly HMI

### BENEFITS

- ISO6 cleaning chamber
- Less contamination of process zones. IN and OUT buffers
- Easy maintenance, stable process and no production stop
- Available options to fit customer's needs
- Very limited downtime
- Easier and faster diagnosis. Upgrading possibility
- Sustainable process

### TECHNICAL DATA

Machine in 1 part

Dimensions .....: 405 x 162 x 205 cm

Weight .....: ~ 800 kg

Electricity .....: 11,8 or 20,2 kW / 400 V (3Ph + N + Gnd)

Flow machine left to right or from right to left

CE compliance

### PERIPHERALS

- Automatic osmosis unit for ultra pure water production
- Draining tank with lift pump
- Ergonomic preparation/control station
- Lens-holders and rack for 12 or 14 lenses



[www.scl-intl.com](http://www.scl-intl.com)

**SCL**  
international

HARD COAT LEADER

